


Max load (N)		1800	1300	700	500	350	250	150	200	100	80
Speed (mm/s)	No load	3.5	5	9	14	18	27	36	54	105	135
	Full load	3	4.5	8	12	15.5	23	31	46	92	115

Recommended max. current: 12 VDC = 3.0 A/24 VDC = 1.5 A Duty cycle: 10% (2 min. in use followed by 18 min. in rest)

No hold force

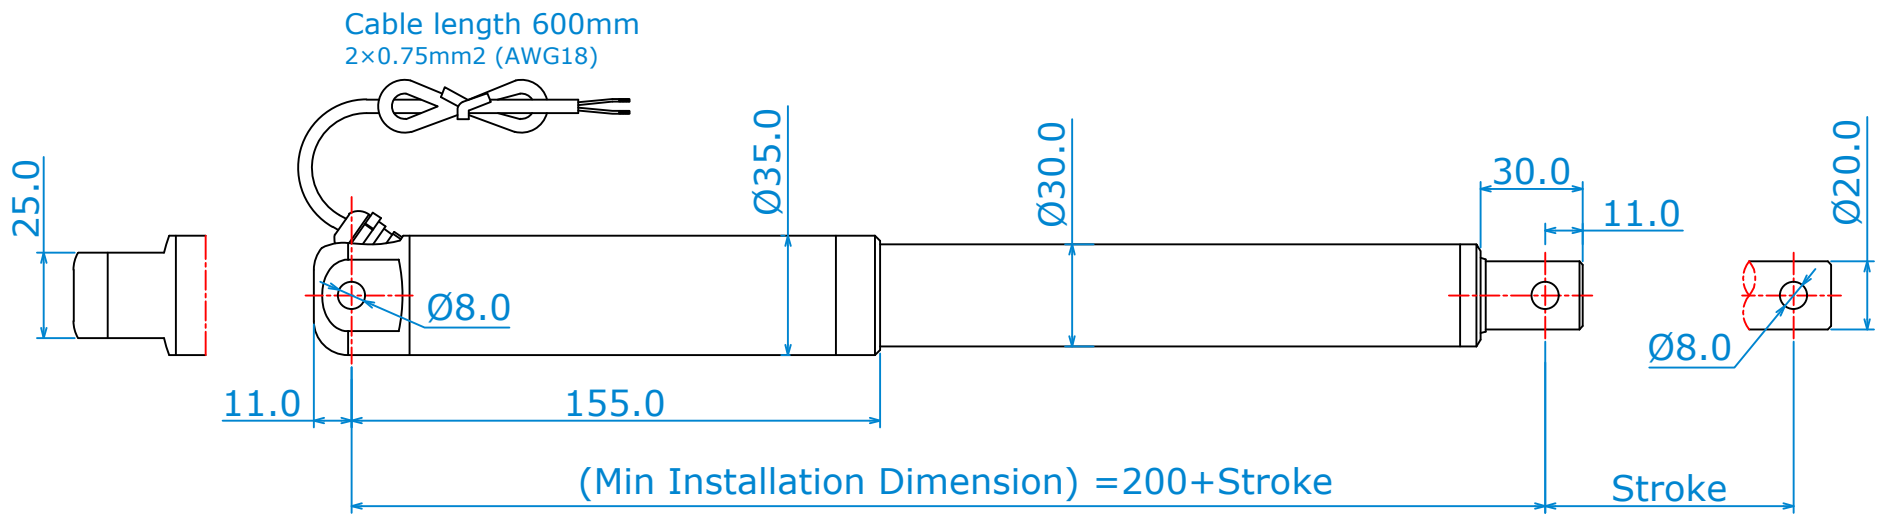

Customized stroke lengths (max:600mm)

Customized cables and connectors

Housing Material: Aluminum Alloy

Ambient Temperature: -25°C ~ +65°C

Colour: Silvery

Noise: ≤ 56dB , Protection Class: IP66

Built-in Limit switches

Min Installation Dimension	Clevis rear	Hall	Stroke ≥ 500
200+S	+10mm	+10mm	+40mm

Drawing Name:

Linear Actuator LP35

5 Dec 2021

