


Max load (N)		2200	2000	1600	800	650	550	300	200	100
Speed (mm/s)	No load	3.5	4.5	5	9	14	18.5	22.5	36	45
	Full load	3	3.5	4	7.5	11.5	15	19	32	39

Recommended max. current: 12 VDC = 3.0 A/24 VDC = 1.5 A Duty cycle: 10% (2 min. in use followed by 18 min. in rest)

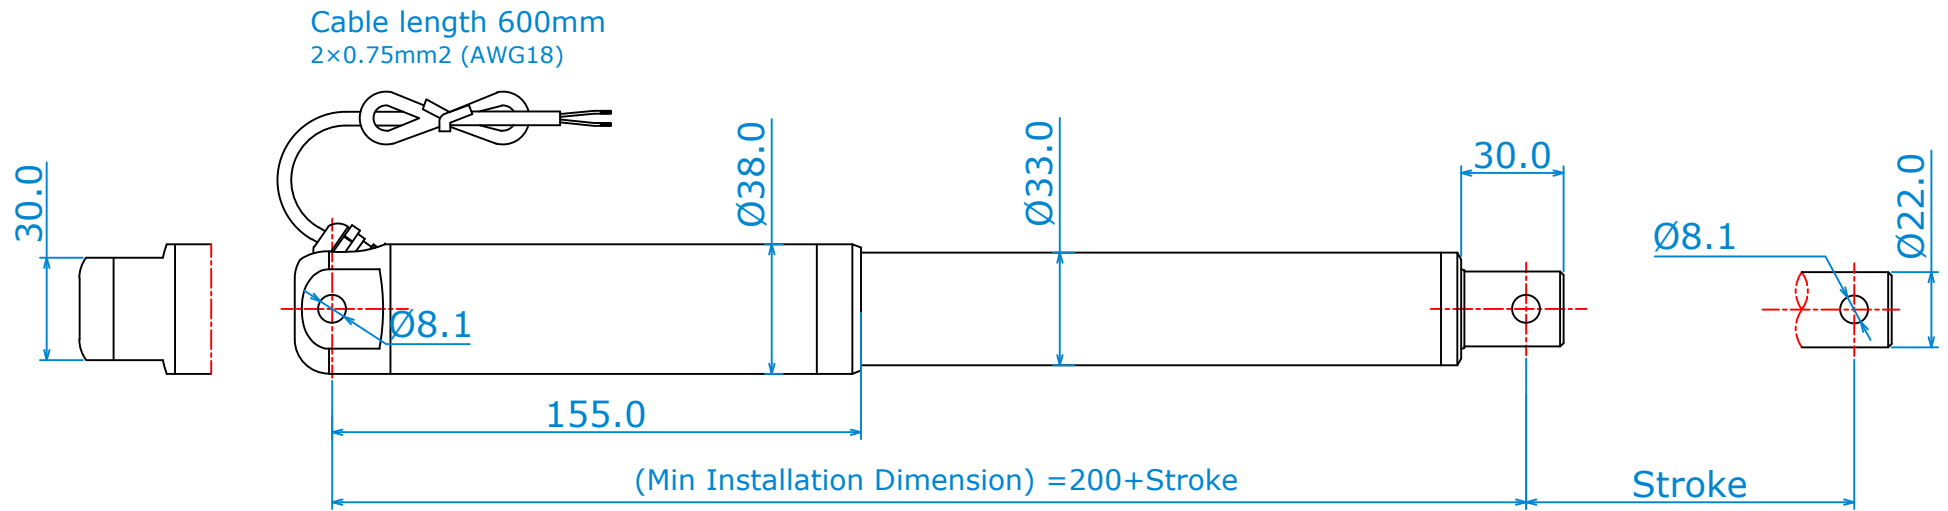

Customized stroke lengths (max:900mm)

Customized cables and connectors

Housing Material: Aluminum Alloy

Ambient Temperature: -25°C ~ +65°C

Colour: Silvery

Noise: ≤ 56dB , Protection Class: IP66

Built-in Limit switches

Min Installation Dimension	Clevis rear	Hall	Stroke ≥ 500
200+S	+10mm	+10mm	+40mm

Drawing Name:

Linear Actuator LP38

5 Dec 2021

